



PROFILE VIEW

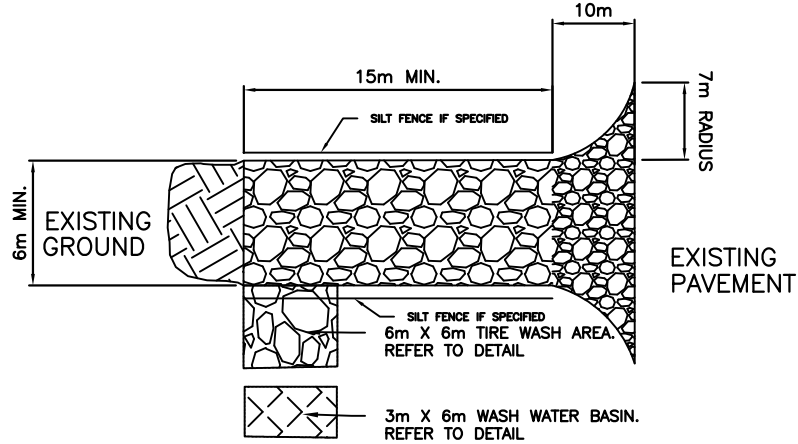

PLAN VIEW

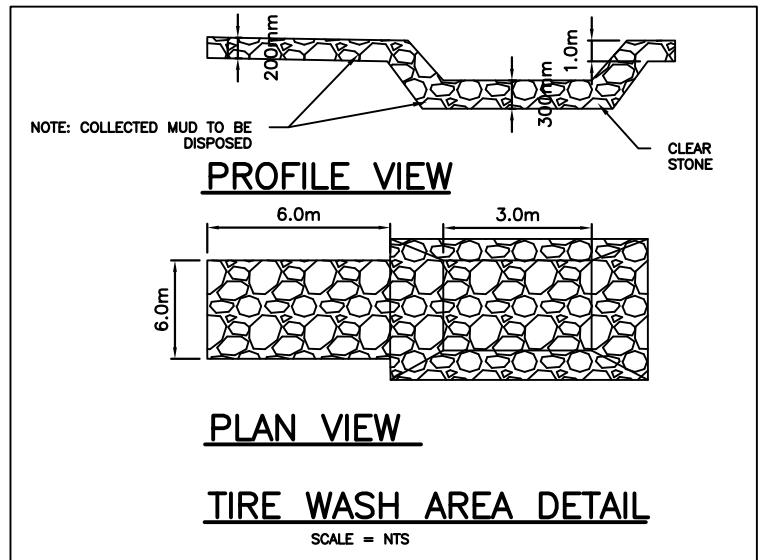

CONSTRUCTION SPECIFICATIONS:

- 1) STONE – FIRST 10m TO BE 50mm DIAMETER CLEARSTONE. REMAINING LENGTH TO BE 150 mm DIAMETER CLEARSTONE OR RIPRAP.
- 2) LENGTH – AS SPECIFIED BUT NOT LESS THAN 25m.
- 3) THICKNESS – NOT LESS THAN 450mm
- 4) WIDTH – AS SPECIFIED , NOT LESS THAN 6m
- 5) FILTER CLOTH TO BE INSTALLED AT ALL CATCHBASINS WITHIN 50m OF ACCESS OR AS SPECIFIED TO PREVENT CONTAMINATION OF STORM SYSTEM
- 6) TIRE WASH TO BE PROVIDED IF SPECIFIED

ALL DIMENSIONS IN METRES EXCEPT WHERE NOTED.



WORKS DEPARTMENT

MUD MAT DETAIL

DWG. DATE: 2022 01
REVISION NO.:
REV. DATE:
SCALE: N.T.S.

S-301.050