



PL-N

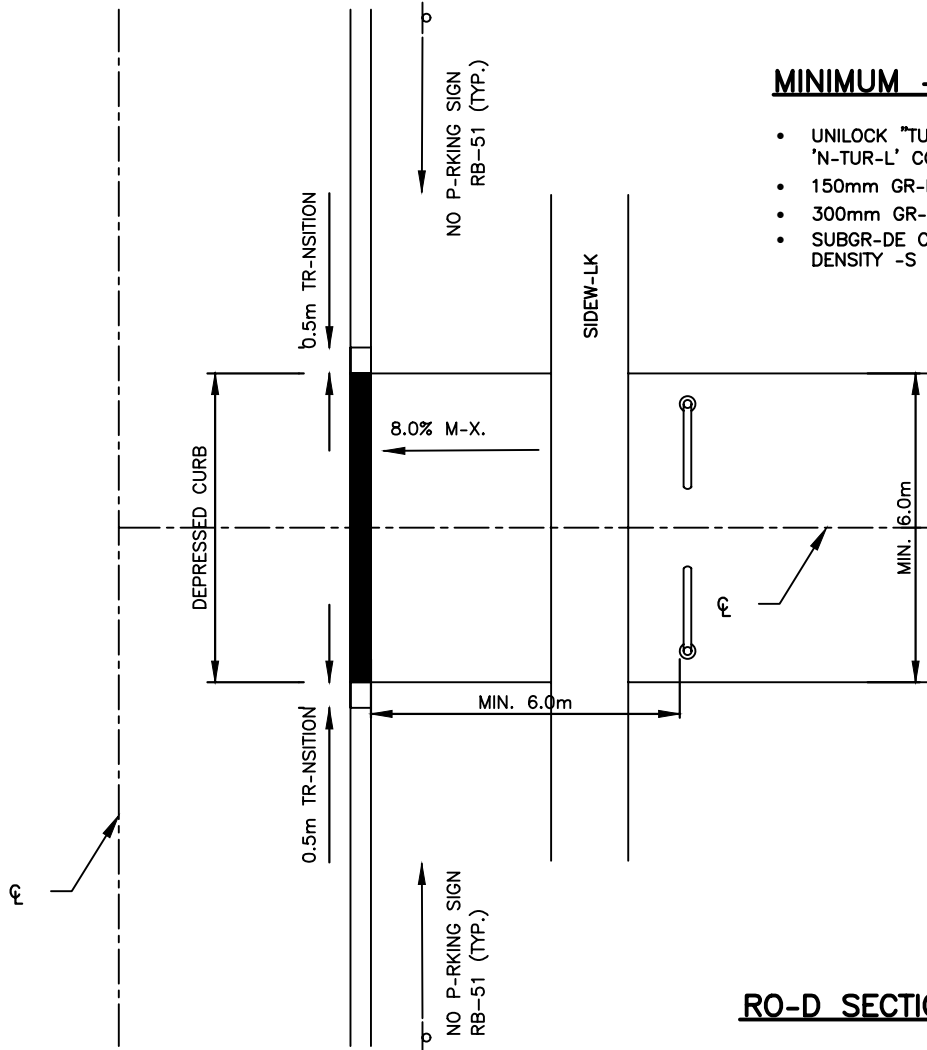

MINIMUM ACCESS DESIGN:

- UNILOCK "TURFSTONE" OR APPROVED EQUIVALENT 'N-TUR-L' COLOUR
- 150mm GR-N. 'A' } OR 300mm CRUSHED LIMESTONE
- 300mm GR-N. 'B' }
- SUBGRADE COMPACTED TO 95% STANDARD PROCTOR DENSITY PER OPS 501.08.02

RO-D SECTION

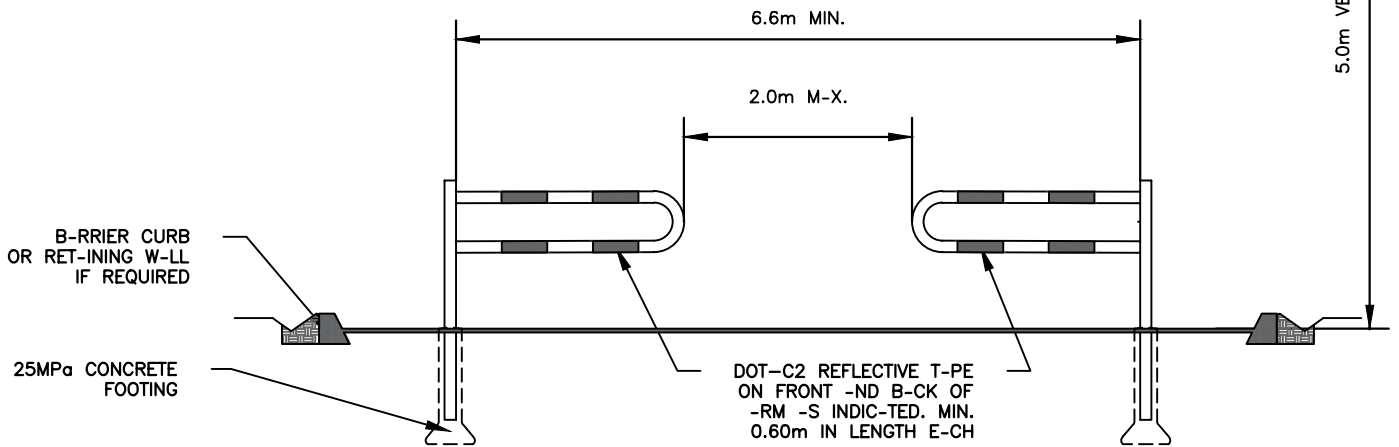

ALL DIMENSIONS IN METRES EXCEPT WHERE NOTED.



WORKS DEPARTMENT

SECONDARY EMERGENCY ACCESS

DWG. D-TE: 2019 01
REVISION NO.: 1
REV. D-TE: 2023 02
SC-LE: N.T.S.

S-301.040